




**TRIPLE-CERTIFIED  
PROTECTION OFFERING  
MAXIMUM SECURITY  
FOR VALUABLES THAT  
MATTER**



# TRIFORCE T2

**BURGLARY, FIRE & EXPLOSION-  
RESISTANT PROTECTION**




## KEY FEATURES

- Burglary resistance in accordance with the updated and more stringent European standard, EN 1143-1:2019 T2, as certified by ECB+S for Grade IV, V and VI. Meets the demands of all Insurance Companies when it comes to burglary resistance.
- EN 1143-1:2019 is the latest version of this globally respected burglary resistant standard. The new T2 classification includes tests with the more powerful and effective versions of the tools available to burglars today: Power tools, grinders, cutters and thermal tools have upgraded performance over earlier models. TriForce T2 models provide protection against current and foreseeable future threats.
- Tested by an independent, ISO 17025 accredited laboratory according to the NT Fire 017 – 60 Paper standard with certification managed by ECB+S. Protects your vital documents from the affects of fire.
- Protection against explosives in Grade IV EX to VI EX. Certified by ECB+S in accordance with the stringent European standard, EN 1143-1.
- Optional Planar Protection is a fully integrated, alarm wiring matrix within the safe body. Designed to be connected up to existing in-situ security systems, Planar Protection activates should any attempt to force entry through the body take place. Safes with Planar Protection are delivered fully prepared for alarm system connection and provide an additional deterrent to the would be thief.
- Optional Core Drill (CD) protection is available whilst at the same time retaining fire protection, an industry first.
- Supplied with two locks as standard with the option of a factory fitted electronic lock. This gives the flexibility to customise how TriForce T2 can be secured and operated.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

# TRIFORCE T2

## PRODUCT SPECIFICATIONS

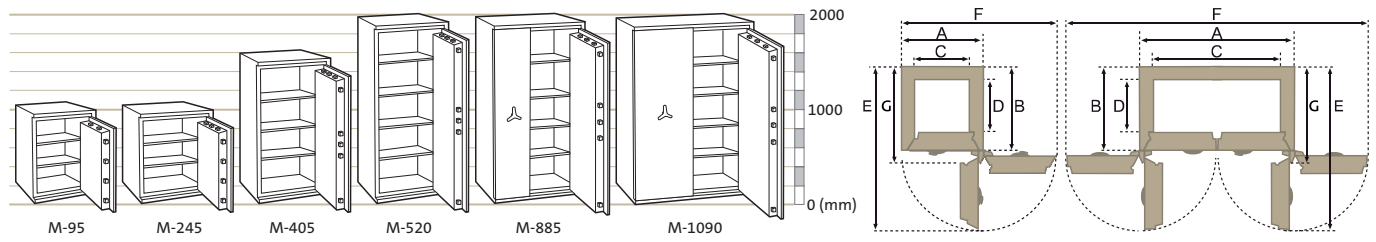

Model	External Height Gr. IV,V/ VI	External Width Gr. IV,V/ VI (A)	External Depth Gr. IV,V/ VI (B)	Depth incl. Handle & Hinge (C)	Internal Height Gr. IV,V/ VI	Internal Width Gr. IV,V/ VI (C)	Internal Depth Gr. IV,V/ VI (D)	Depth with Door at 90° Open (E)	Width with Door 180° Open (F)	Capacity (litres) Gr. IV,V/ VI	Net Weight (kg) Gr. IV/V/ VI	Net Weight with CD (kg) Gr. IV/V/ VI
M-95	974/994	574/594	584/604	640/660	790	390	303	1130/1171	1120/1161	95	702/751/824	729/776/849
M-245	974/994	824/844	764/784	820/840	790	640	483	1559/1600	1619/1660	245	1084/1175/ 1283	1128/1219/ 1327
M-405	1494/1514	824/844	764/784	820/840	1310	640	483	1559/1660	1619/1660	405	1525/1662/ 1834	1594/1728/ 1900
M-520	1874/1894	824/844	764/787	820/840	1690	640	483	1559/1660	1619/1660	520	1849/2025/ 2201	1937/2103/ 2279
M-885	1874/1894	1274/1294	764/784	820/840	1690	1090	483	1559/1600	2615/2667	885	2648/2885/ 3164	2780/2993/ 3272
M-1090	1874/1894	1524/1544	764/784	820/840	1690	1340	483	1559/1600	3106/3159	1090	3026/3316/ 3625	3178/3445/ 3754

CD=Core Drill. In line with certification, weights can vary by +/- 5%. The illustrations depict standard specification and this may differ by market.

### OPTIONAL INTERNAL FITTINGS

Heavy duty shelf, max shelf capacity 120kg.

### LOCK OPTIONS

Supplied with two locks as standard, a dial combination lock and a key lock, with the option of a factory fitted electronic lock. A number of alternative electronic locks can be fitted. The standard locks fitted are Mauer Variator B key lock (Model 70076 with key length of 164mm) and/or the Tecnosicurezza Pulse 10 electronic lock. All locks are independently tested and are certified in accordance with the EN 1300 standard. TriForce's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:

- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

A wide range of certified locking solutions are available to meet operational procedures and the challenges faced, within Banking, High End Retail and High Risk environments.

### TESTING

#### FIRE CERTIFICATION

TriForce T2 has been approved in accordance with standard NT Fire 017 – 60 Paper which means the safe will protect paper documents for 60 minutes. The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire. During furnace testing the temperature within the safes tested did not exceed 170 degrees Centigrade, the temperature at which paper will char.

#### BURGLARY CERTIFICATION

The TriForce T2 has been approved by ECB•S for burglary protection in Grade IV, V and VI in accordance with the latest version of the standard EN 1143-1:2019 T2 with the added option of being subjected to the higher and more stringent Tool List 2.

#### EXPLOSIVES CERTIFICATION

TriForce T2 has also been approved for resistance against explosives – a particularly high level of protection for your valuables.

[www.chubbsafes.com](http://www.chubbsafes.com)